

## Ran<sup>®</sup> 1" (25.4 mm)


Conductive Polypropylene Body  
Diaphragm Pump



### Technical Specifications

Pump Code	EXD25-PS-2	Pump Housing Material	Conductive Polypropylene
Max. Flow Rate	208 lpm	Center Section Material	Conductive Polypropylene
Max. Pump Speed	280 cpm	Max. Size Pumpable Solids	3 mm
Displacement per cycle	0.74 liter	Max. Suction Lift	9.5 m (Wet) 5 m (Dry)
Fluid Inlet- Outlet Size	1" ANSI Flange	Max. Operating Temperature	80 °C
Air Inlet Size	3/8"	Sound Level	75 dBA (at 5 bar)
Max. Fluid Working Pressure	8 bar	Diaphragm Material	TPE
Max. Air Consumption (at 5 bar)	1 m <sup>3</sup> /min	Check-Valve Material	TPE
Ratio	1:1	Weight	10.2 kg

### Performance Curves

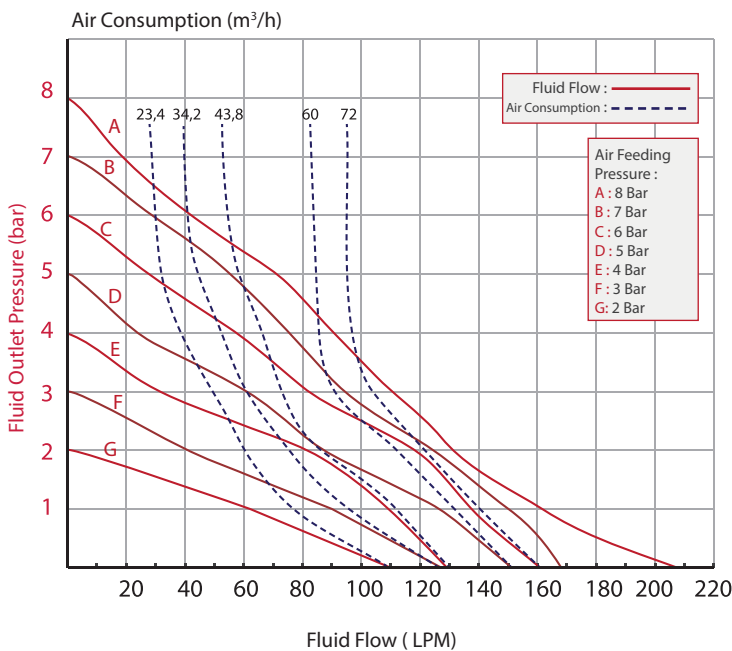

**Made in Turkey**



**ATEX II 2gd IIb t135**

**Test Conditions:** All tests are made with water. Suction hose submerged in the fluid. Muffler not used. All the values are shown are approximate and not binding.

**Example:** To pump 88 lpm against a discharge pressure of 2 bar, requires 5 bar and 43.8 m<sup>3</sup>/h air consumption.

### Dimensions

A	308
B	507
C	107
D	16
E	378
F	210
G	198
H	150
I	11

