

Ran[®] 3/8" (9.52 mm)


Conductive Polypropylene Body
Diaphragm Pump



Technical Specifications

Pump Code	EXK10-P1	Pump Housing Material	Conductive Polypropylene
Max. Flow Rate	22 lpm	Center Section Material	Conductive Polypropylene
Max. Pump Speed	250 cpm	Max. Size Pumpable Solids	1.5 mm
Displacement per cycle	0.09 liter	Max. Suction Lift	9.5 m (Wet) 3 m (Dry)
Fluid Inlet- Outlet Size	3/8" NPT	Max. Operating Temperature	80 °C
Air Inlet Size	1/4"	Sound Level	61 dBa (at 5 bar)
Max. Fluid Working Pressure	8 bar	Diaphragm Material	PTFE
Max. Air Consumption (at 5 bar)	15.6 m ³ /h	Check-Valve Material	PTFE
Ratio	1:1	Weight	2.2 kg

Performance Curves

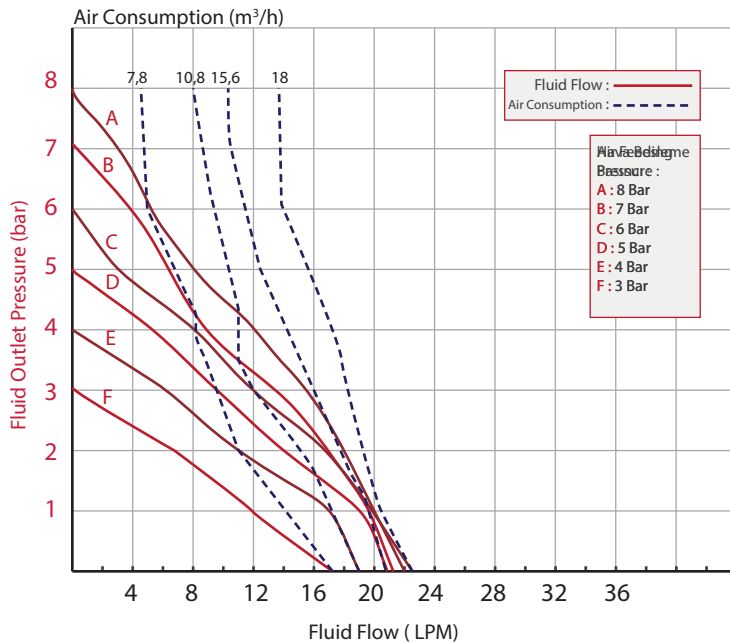

Made in Turkey






ATEX II 2gd IIb t135

Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. All the values are shown are approximate and not binding.

Example: To pump 12 lpm against a discharge pressure of 3 bar, requires 6 bar and 10.8 m³/h air consumption.

Dimensions

A	182
B	275
C	132
D	220
E	32
F	142
G	85
H	8.5

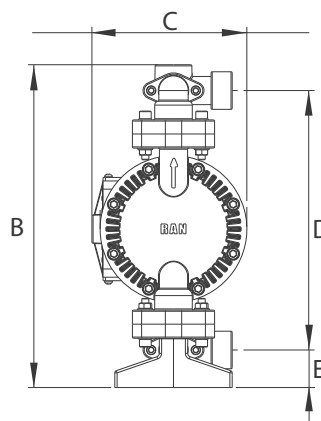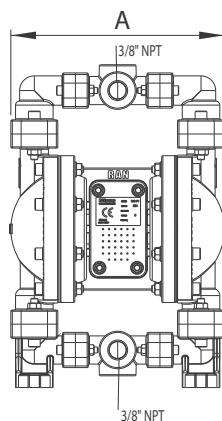

All dimensions are in mm.